







TECHNICAL DRAWING

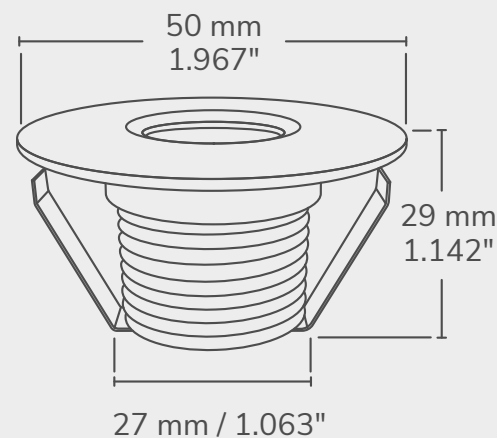

TECHNICAL SPECIFICATIONS

• Voltage	: 12/24 V DC	• Cutout size	: 35mm / 1.378 inches
• Light Intensity	: 125 Lumens	• Lifespan	: 25 000 Hours
• Consumption	: 1 Watts	• Dimmable	: Yes
• Incandescent Equivalent	: 20 Watts	• Protection Rating	: IP67
• Colors and temperatures	: 3000K, 4000K, RGB	• Trim Options	: 1 side, 2 sides, Round, Square & Round Louver
• Projection angle	: 25°	• Trim Colors	: White, Black & Brushed Stainless
• IRC	: >80		
• Power Factor	: +90		

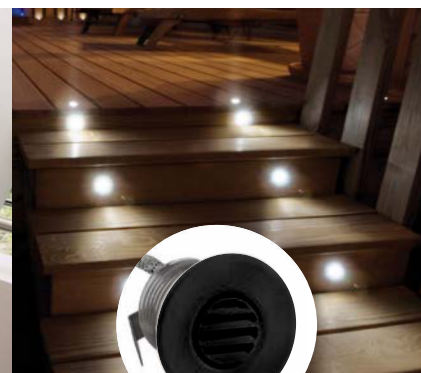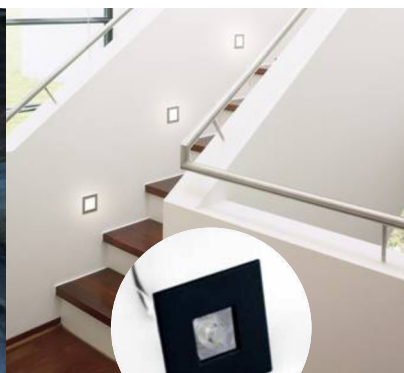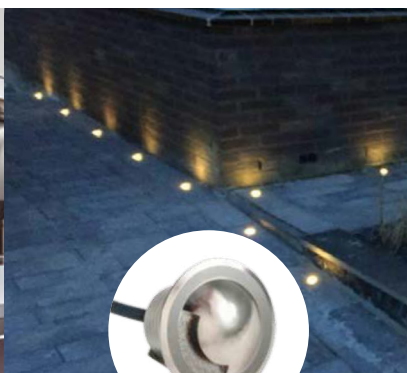

TRIM OPTIONS

MODELS

PRODUCT NUMBERS



1 Way Stainless Steel

LCPK2000R-1W-1S-30K

LCPK2000R-1W-1S-40K



2 Way Stainless Steel

LCPK2000R-1W-2S-30K

LCPK2000R-1W-2S-40K



Square Black

LCPK2000S-1W-BK-30K

LCPK2000S-1W-BK-40K



Square White

LCPK2000S-1W-WH-30K

LCPK2000S-1W-WH-40K



Square Brushed Stainless

LCPK2000S-1W-BS-30K

LCPK2000S-1W-BS-40K



Round Black

LCPK2000R-1W-BK-30K

LCPK2000R-1W-BK-40K



Round White

LCPK2000R-1W-WH-30K

LCPK2000R-1W-WH-40K



Round Brushed Stainless

LCPK2000R-1W-BS-30K

LCPK2000R-1W-BS-40K



Round Louver Black

LCPK2000P-1W-BK-30K

LCPK2000P-1W-BK-40K



Round Louver Stainless

LCPK2000P-1W-BS-30K

LCPK2000P-1W-BS-40K