




TECHNICAL DRAWING

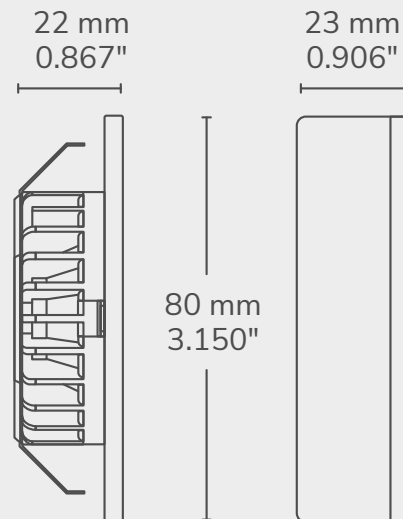

TECHNICAL SPECIFICATIONS

- | | | | |
|------------------|---------|------------------|-----------------------|
| • Lumens @ 3000K | : 210lm | • Cutout size | : 60mm (2.362 inches) |
| • Lumens @ 4000K | : 225lm | • Recessed mount | : Yes |
| • Lumens @ 5000K | : 240lm | • Surface mount | : Yes (with spacer) |
| • Beam Angle | : 120° | • Weight | : 70g |
| • CRI | : >90 | • Lifespan | : 25 000 hrs |
| • Input Voltage | : 24V | | |
| • Power | : 3W | | |
| • Dimmable | : Yes | | |

PRODUCT NUMBERS

12V : LCPK300-12V-CCT

24V : LCPK300-24V-CCT



TRIM OPTIONS

MAGNETIC FACE TRIM



The PK300 LED Pucks are available in 3 colors:

White

Black

Brushed Aluminum

SURFACE MOUNT SPACER



COLOR TEMPERATURE SETTINGS



CCT is controlled by the toggle switch on the puck front

Toggle it to the rightmost, the Light is set at CW (3000K)

Toggle it to the middle, the Light is set at NW (4000K)

Toggle it to the leftmost, the Light is set at WW (5000K)

3 COLOR TEMPERATURE SETTINGS

Traditional White (3000K)

Warm White (4000K)

Natural White (5000K)

